



High Quality Oil

Extend Your Engine Life With Lower Cost



Why Golden Oil ?

We are proud to introduce the Golden Oil which is 100% virgin oil and FREE from any recycled oil. It is the best, and available in big range of types and works with all kinds of engines. Golden Oil designed to help the engine to be in its best performance and to reduce the consumption of fuel in all kinds of engines. Golden Oil is used to help cleaning the engine. It is reduces residues of 50% of turbo engines and in all other kinds.



Our Gasoline and Diesel engine oil certified by Emirates Authority For Standardization & Metrology and passed testing of INTERTEK which is one of the leaders of testing companies worldwide in industrial testing and approved by all GCC Standardization Authorities.

Golden Oil will release in market soon other products with high performance also like Hydraulic Oil, Gear oil and Grease.

GAZOLINE ENGINE OIL

Ultra Syn is an advanced technology semi synthetic lubricant developed from unique XHVI base fluids and specially selected additive technology to provide the superior performance & protection operating under the extreme driving conditions.

Performance Specifications / Standards Matched

APISN	VW 500.00, 501.01, 505.00
ACEA A5/B5-04	vW Longlife Oil
MB 229.1	Ford Motor Co. M2C-153E
Japanese Engines Qualified	Peugeot-Citroen

Performance Features & Benefits


- ✓ Lengthens oil changes period.
- ✓ Prolongs engine life.
- ✓ Reduced maintenance costs through extended engine life.
- ✓ Reduced running costs through improved oil and fuel efficiency.
- ✓ Highest thermal stability.
- ✓ Superior antifriction and engine cleaning properties.

Applications

All naturally aspirated, fuel injected, turbo-charged and multi valve Passenger car engines fueled by gasoline.

Typical Physical Characteristics

SAE Viscosity Grade	10W/30	10W/40	15W/40	15W/50	20W/50
Density @ 15°C, kg/cu.m	0.871	0.874	0.885	0.886	0.892
Kinematic Viscosity @ 40°C, cSt	74	91	98.8	141	142
Kinematic Viscosity @ 100°C, cSt	12.2	14.2	14.84	19.3	18.5
Viscosity Index	164	162	157	156	147
Flash Point, COC, °C	220	220	224	224	236
Pour Point, °C	-33	-33	-30	-30	-27
TBN, mgm KOH/gm	8.3	8.3	8.3	8.3	8.3

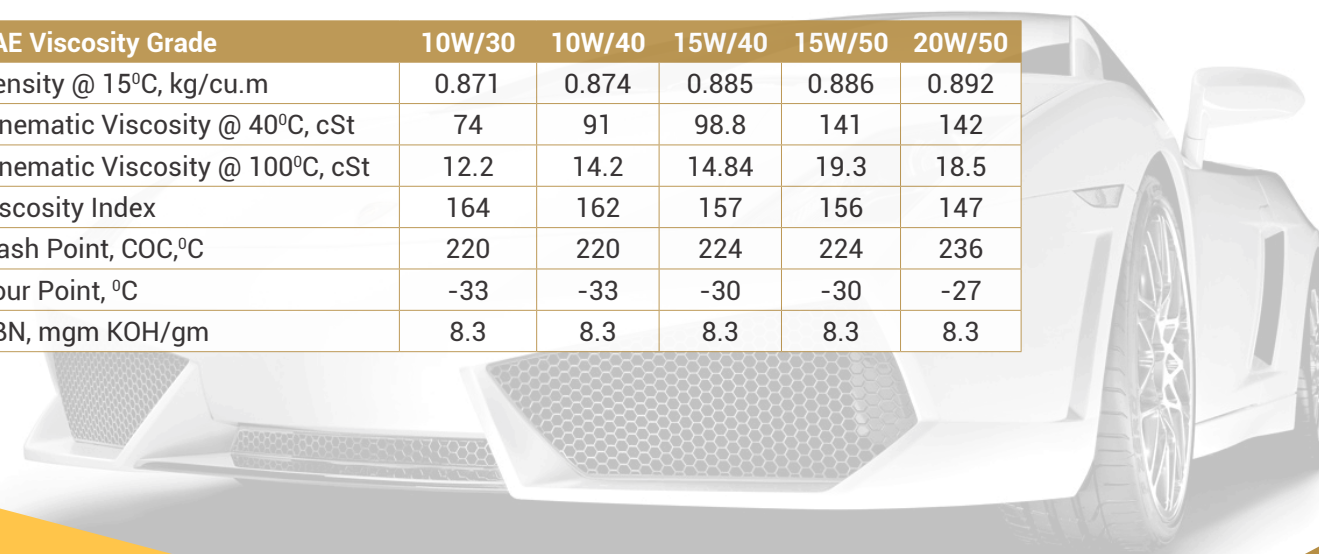

DIESEL ENGINE OIL

Golden Oil is an advanced technology lubricant designed from unique XHVI (Group II) base fluids and specially selected unique additive technology to meet needs of the low emission and high performance diesel engines.

Performance Specifications / Standards Matched

API CI-4/SL	ZF TE-ML 07C
ACEA A2/B3/E2	Volvo VDS-2
MAN 271	MTU Type 1
MB 229.1, 228.1	Caterpillar ECF-1-a
Cummins CES 20076	MACK EO-M Plus
Renault Truck RD/RD-2	

Performance Features & Benefits

- ✓ Exclusive additive to ensure protection against corrosion & soot-related wear & provide longer oil life in Euro, US & other advanced engines.
- ✓ The exclusive additive system delivers improved engine cleanliness & protection against piston deposits to exceed the latest demanding requirements of OEMs.
- ✓ Demonstrated performance for all applications from severe duty in mining & construction operations to heavy duty haulage in some of the world's most severe requirements.

Applications

- ▶ Latest high power heavy duty diesel engines in both over the-road and off-highway applications.
- ▶ High technology low emission engines.
- ▶ High-speed four-stroke diesel engines using sulphur content upto 0.5% weight.

Typical Physical Characteristics

SAE Viscosity Grade	15W/40	15W/50	20W/50
Density @ 15°C, kg/cu.m	0.885	0.886	0.892
Kinematic Viscosity @ 40°C, cSt	114.3	151	165
Kinematic Viscosity @ 100°C, cSt	15.1	18.5	18.5
Viscosity Index	138	138	126
Flash Point, COC, °C	216	216	220
Pour Point, °C	-27	-27	-24
TBN, mgm KOH/gm	9.3	9.3	9.3

HYDRAULIC OIL

Hydrotreated mineral base fluids and unique zine-free additive technology to offer improved performance capable of meeting the demands of the most modern non-g geared steam turbine systems and light duty gas turbines

Performance Specifications / Standards Matched

DIN 51524 Part 1	Denison HF-1
General Electric GEK 28143A, 32568F	Westinghouse 21 T0591
Deutsche Industrie Norm DIN 51515	ISO 8068
Alstom Power (ABB) HTGD 90117	Solar Turbines ES9-224R
Alstom Power NBA P 5001	Siemens TLV 9013 04
Cincinnati Milacron P-38, P-55 & P-57	US Military MIL-H-17672D

Performance Features & Benefits

- ✓ Longer oil life with smooth operations.
- ✓ Outstanding thermal stability at very high temperature.
- ✓ Strong demulsibility power, air release capability and filterability.
- ✓ Outstanding filterability and good shear stability.
- ✓ Enhanced resistance to foaming and oxidation.
- ✓ Long term corrosion, wear and rust protection.
- ✓ Improved compatibility with seals and soft metals.
- ✓ Low sludging tendency and outstanding load carrying ability.

Applications

- ▶ Recommended for the lubrication of non-g geared Industrial steam and light duty gas turbines used in electric power generation, pipeline transmission, power take off and marine propulsion, using non-ferrous alloys, operating under severe-service conditions.
- Other uses are:**
 - ▶ Water turbine lubrication.
 - ▶ Light duty or non-antiwear hydraulic system.
 - ▶ Compressor applications.

Typical Physical Characteristics

ISO Viscosity Grade - HL	22	32	46	68	100
Density @ 15°C, kg/cu.m	0.866	0.874	0.879	0.881	0.886
Kinematic Viscosity @ 40°C, cSt	22	32	46	68	100
Kinematic Viscosity @ 100°C, cSt	4.3	5.4	6.7	8.6	11.2
Viscosity Index	102	101	98	97	98
Flash Point, COC, °C	204	210	216	220	226
Pour Point, °C	-21	-18	-15	-12	-12
TBN, mgm KOH/gm	0.15	0.15	0.15	0.15	0.15
Demulsibility	40-40-0	40-40-0	40-40-0	40-40-0	40-40-0
Rust Test (Method B) Oxidation	No rust	No rust	No rust	No rust	No rust

RANGE OF PRODUCTS


Engine Oil



Gear Oil



Haidraulic Oil



Grease



ENGINE OIL PACKING

Available in 3 sizes



1L Gazoline & Diesel




4L Gazoline



5L Diesel


CERTIFICATIONS

By Emirates Authority For Standardization & Metrology



هيئة الإمارات للمواصفات والمقاييس
Emirates Authority For Standardization & Metrology

نظام تقويم المطابقة الإماراتي (إيكاس)
شهادة مطابقة
CERTIFICATE OF CONFORMITY
EMIRATES CONFORMITY ASSESSMENT SCHEME



Certificate No: 16-03-1149/E15-11-007458

Report No: See Attached Schedule of Certification

Issue Date: 07 MARCH 2016

Valid Until: 06 MARCH 2017

Issued To: AL KHAT AL ASWAD GENERAL TRADING L.L.C.
P.O. BOX 120265, DUBAI, UAE

رقم الشهادة:

رقم التقرير:

التاريخ:

صالحة لغاية:

أصدرت الى:


Product: LUBRICATING OILS FOR INTERNAL COMBUSTION ENGINES


إسم المنتج:

الاسم التجاري Brand Name	الطراز Model	تفاصيل المنتج Product Details	بلد المنشأ Country of Origin
GOLDEN OIL	See Attached Schedule Of Certification		UAE


Product is registered under the Emirates Conformity Assessment System (ECAS) based on compliance to the following requirements:

GSO 1785/2013 Lubricating Oils for internal Combustion Engines






Director of Conformity Affairs Department



ص ب 48666 دبي، الإمارات العربية المتحدة
P.O.Box 48666 Dubai, United Arab Emirates


ص ب 2166 أبو ظبي، الإمارات العربية المتحدة
P.O.Box 2166 Abu Dhabi, United Arab Emirates

www.esma.gov.ae



هيئة الإمارات للمواصفات والمقاييس
Emirates Authority For Standardization & Metrology
Conformity Affairs Department إدارة شؤون المطابقة

بيان التسجيل
SCHEDULE OF CERTIFICATION




Company Name:		AL KHAT AL ASWAD GENERAL TRADING LLC						اسم الشركة:
Product Category:		LUBRICATING OIL FOR INTERNAL COMBUSTION ENGINES						فئة المنتج:
Certificate No.:		16-03-1149/E15-11-007458						رقم التسجيل:
تسلسل رقم Count	الاسم التجاري Brand Name	رقم الطراز Model No.	تفاصيل المنتج Product Details	رقم تقرير الفحص Test Report Number	بلد المنشأ Country of Origin	تاريخ التسجيل Registration Date	صالحة لغاية Valid Until	
1	GOLDEN OIL	API SN	GASOLINE ENGINE OIL SAE 5W40 1.4 Liters	INTERTEK AE13126183/SHRJ4612-01/15	UAE	07 MARCH 2016	06 MARCH 2017	
2	GOLDEN OIL	API SN	GASOLINE ENGINE OIL SAE10W30 1.4Liters	INTERTEK AE13126183/SHRJ4612-01/15	UAE	07 MARCH 2016	06 MARCH 2017	
3	GOLDEN OIL	API SN	GASOLINE ENGINE OIL SAE10W40 1.4Liters	INTERTEK AE13126183/SHRJ4612-01/15	UAE	07 MARCH 2016	06 MARCH 2017	
4	GOLDEN OIL	API SN	GASOLINE ENGINE OIL SAE15W40 1.4Liters	INTERTEK AE13126183/SHRJ4612-01/15	UAE	07 MARCH 2016	06 MARCH 2017	
5	GOLDEN OIL	API SN	GASOLINE ENGINE OIL SAE15W50 1.4Liters	INTERTEK AE13126183/SHRJ4612-01/15	UAE	07 MARCH 2016	06 MARCH 2017	
6	GOLDEN OIL	API SN	GASOLINE ENGINE OIL SAE20W50 1.4Liters	INTERTEK AE13126183/SHRJ4612-01/15	UAE	07 MARCH 2016	06 MARCH 2017	
7	GOLDEN OIL	API CI-4/SL	DIESEL ENGINE OIL SAE 15W40 1.5 Liters	INTERTEK AE13126183/SHRJ4612-02/15	UAE	07 MARCH 2016	06 MARCH 2017	

Form: ECAS Schedule of Certification For Lubricating Oils for Internal Combustion Engines
Page 1 of 2


Revision: 2

Identification no.: CAFOR-62
Date of Review: 25/05/2015



هيئة الإمارات للمواصفات والمقاييس
Emirates Authority For Standardization & Metrology
Conformity Affairs Department إدارة شؤون المطابقة

بيان التسجيل
SCHEDULE OF CERTIFICATION




Company Name:		AL KHAT AL ASWAD GENERAL TRADING LLC						اسم الشركة:
Product Category:		LUBRICATING OIL FOR INTERNAL COMBUSTION ENGINES						فئة المنتج:
Certificate No.:		16-03-1149/E15-11-007458						رقم التسجيل:
تسلسل رقم Count	الاسم التجاري Brand Name	رقم الطراز Model No.	تفاصيل المنتج Product Details	رقم تقرير الفحص Test Report Number	بلد المنشأ Country of Origin	تاريخ التسجيل Registration Date	صالحة لغاية Valid Until	
8	GOLDEN OIL	API CI-4/SL	DIESEL ENGINE OIL SAE 20W50 1.5 Liters	INTERTEK AE13126183/SHRJ4612-02/15	UAE	07 MARCH 2016	06 MARCH 2017	
- NOTHING FOLLOWS -								

Form: ECAS Schedule of Certification For Lubricating Oils for Internal Combustion Engines
Page 2 of 2

Revision: 2

Identification no.: CAFOR-62
Date of Review: 25/05/2015



Director of Conformity Affairs Department

PRODUCT LIST

The Four Major Types

Motor Oil

#	Item	Packing	Milage Range (KM)
1	Motor Oil SAE 10W/40 API/SN	6x4 L SP	10,000-12,000
2	Motor Oil SAE 10W/40 API/SN	24x1 L SP	10,000-12,000
3	Motor Oil SAE 5W/40 API/SN	6x4 L SP	10,000-12,000
4	Motor Oil SAE 10W/30 API/SN	6x4 L SP	10,000-12,000
5	Motor Oil SAE 10W/40 API/SL	6x4 L SP	5,000-7,000
6	Motor Oil SAE 20W/50 API/SL	6x4 L SP	5,000-7,000
7	Diesel Oil SAE 15W/40 API/CI-4 SL	6x5 L SP	7,000
8	Diesel Oil SAE 20W/50 API/CI-4 SL	6x5 L SP	7,000
9	Diesel Oil HD 40	208 L DRUM	5,000
10	Diesel Oil HD 50	208 L DRUM	5,000

Gear Oil

#	Item	Packing	Milage Range (KM)	Transmission Type
1	Gear Oil SAE 80W/90 API GL-4	24x1 L	50,000-60,000	Manual
2	Gear Oil SAE 80W/90 API GL-5	24x1 L	50,000-60,000	Manual
3	Gear Oil SAE 85W/140 API GL-4	24x1 L	50,000-60,000	Manual
4	ATF DEXRON III	24x1 L	50,000-60,000	Auto
5	ATF DEXRON II	24x1 L	50,000-60,000	Auto

Hydraulic Oil

#	Item	Packing					
1	Hydraulic Oil H10	6x5 L	6x4 L	24x1 L	25 L	20 L	208 L
2	Hydraulic Oil H15	6x5 L	6x4 L	24x1 L	25 L	20 L	208 L
3	Hydraulic Oil H22	6x5 L	6x4 L	24x1 L	25 L	20 L	208 L
4	Hydraulic Oil H32	6x5 L	6x4 L	24x1 L	25 L	20 L	208 L
5	Hydraulic Oil H37	6x5 L	6x4 L	24x1 L	25 L	20 L	208 L
6	Hydraulic Oil H46	6x5 L	6x4 L	24x1 L	25 L	20 L	208 L
7	Hydraulic Oil H68	6x5 L	6x4 L	24x1 L	25 L	20 L	208 L
8	Hydraulic Oil H100	6x5 L	6x4 L	24x1 L	25 L	20 L	208 L

Grease

#	Item	Packing (1)	Packing (2)
1	MP Grease No. 2	180 KG	15 KG
2	MP Grease No. 3	180 KG	15 KG
3	MP EP 2	180 KG	15 KG
4	MP EP 3	180 KG	15 KG



Attractive Commercial Agencies

📍 27712, Abu Dhabi. UAE
☎ +971-2-6262693
📠 +971-2-6262695
📞 +971-55-7744402
✉ info@goldenoil.ae



www.GoldenOil.ae

For Orders & Enquiry

Mr. Hayian Mousa
☎ +971-56-2922448

Mr. Sufian Khattab
☎ +971-50-6902464